



Socay TVS Diodes 5000w Surface Mount Transient Voltage Suppressors 5.0SMDJ78 SMC

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: Socay
- Certification: UL, REACH, RoHS, ISO
- Model Number: 5.0SMDJ78
- Minimum Order Quantity: 500PCS
- Price: Negotiable
- Packaging Details: tape reel, bulk
- Delivery Time: 1-3WEEKS



Product Specification

- Name: TVS Diodes
- Reverse Stand-off Voltage: 78.0V
- Breakdown Voltage @It Min: 86.7V
- Breakdown Voltage @It Max: 95.8V
- Test Current: 1mA
- Maximum Clamping Voltage 126.0V @Ipp:
- Maximum Peak Pluse Current: 40.08A
- Maximum Reverse Leakage 5μA @Vrwm:
- Package Size: DO-214AB/SMC
- Storage Temperature Range: -55 To +150

for more products please visit us on socaydiode.com

Product Description

Socay TVS Diodes 5000w Surface Mount Transient Voltage Suppressors 5.0SMDJ78 SMC

DATASHEET: [5.0SMDJ_v2107.1 .pdf](#)

5.0SMDJ78 TVS Diode Profile:

The 5.0SMDJ series is specifically designed to protect sensitive electronic equipment from voltage transients caused by lightning and other transient voltage events.

5.0SMDJ78 TVS Diode Application:

TVS devices are ideal for the protection of I/O interfaces, VCC bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications

5.0SMDJ78 TVS Diode Feature:

Low leakage
Uni and Bidirectional unit
Glass passivated junction
Low inductance
Excellent clamping capability

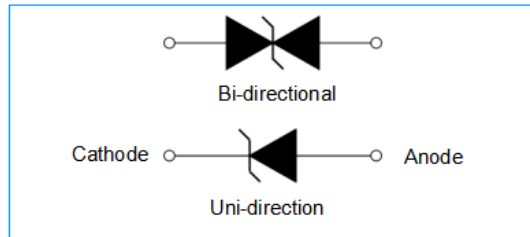
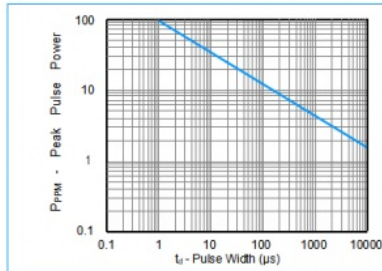
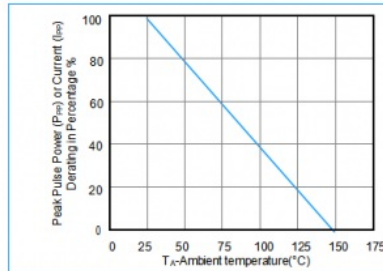
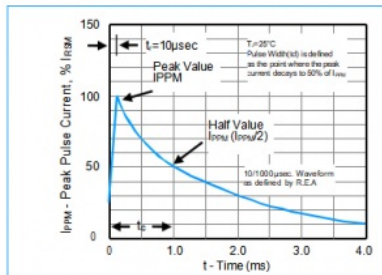
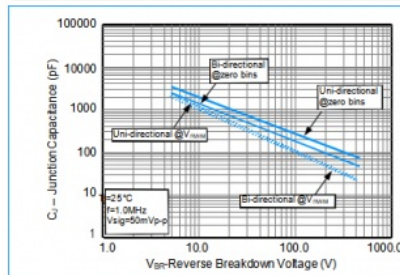
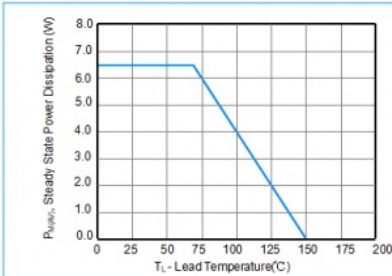
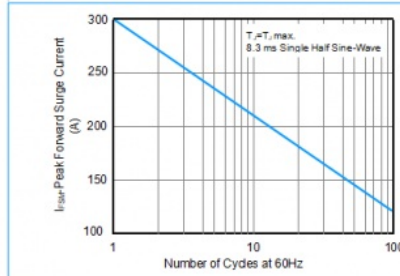
Electrical Characteristics (TA=25 unless otherwise noted)

Part Number		Marking		Reverse Stand-Off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_{RWM} (μ A)
Uni	Bi	Uni	Bi		MIN	MAX				
—	5.0SMDJ8.0CA	—	5BDP	8.0	8.89	9.83	1	13.6	367.60	100
5.0SMDJ11A	5.0SMDJ11CA	5PDX	5BDX	11.0	12.20	13.50	1	18.2	277.47	800
5.0SMDJ12A	5.0SMDJ12CA	5PDZ	5BDZ	12.0	13.30	14.70	1	19.9	253.77	800
5.0SMDJ13A	5.0SMDJ13CA	5PEE	5BEE	13.0	14.40	15.90	1	21.5	234.88	500
5.0SMDJ14A	5.0SMDJ14CA	5PEG	5BEG	14.0	15.60	17.20	1	23.2	217.67	200
5.0SMDJ15A	5.0SMDJ15CA	5PEK	5BEK	15.0	16.70	18.50	1	24.4	206.97	100
5.0SMDJ16A	5.0SMDJ16CA	5PEM	5BEM	16.0	17.80	19.70	1	26.0	194.23	50
5.0SMDJ17A	5.0SMDJ17CA	5PEP	5BEP	17.0	18.90	20.90	1	27.6	182.97	20
5.0SMDJ18A	5.0SMDJ18CA	5PER	5BER	18.0	20.00	22.10	1	29.2	172.95	10
5.0SMDJ19A	5.0SMDJ19CA	5PET	5BET	19.0	21.10	23.30	1	30.8	164.07	10
5.0SMDJ20A	5.0SMDJ20CA	5PEV	5BEV	20.0	22.20	24.50	1	32.4	155.86	5
5.0SMDJ22A	5.0SMDJ22CA	5PEX	5BEX	22.0	24.40	26.90	1	35.5	142.25	5
5.0SMDJ24A	5.0SMDJ24CA	5PEZ	5BEZ	24.0	26.70	29.50	1	38.9	129.82	5
5.0SMDJ26A	5.0SMDJ26CA	5PFE	5BFE	26.0	28.90	31.90	1	42.1	119.95	5
5.0SMDJ28A	5.0SMDJ28CA	5PFG	5BFG	28.0	31.10	34.40	1	45.4	111.23	5
5.0SMDJ30A	5.0SMDJ30CA	5PFK	5BFK	30.0	33.30	36.80	1	48.4	104.34	5
5.0SMDJ33A	5.0SMDJ33CA	5PFM	5BFM	33.0	36.70	40.60	1	53.3	94.75	5
5.0SMDJ36A	5.0SMDJ36CA	5PFP	5BFP	36.0	40.00	44.20	1	58.1	86.92	5
5.0SMDJ40A	5.0SMDJ40CA	5PFR	5BFR	40.0	44.40	49.10	1	64.5	78.29	5
5.0SMDJ43A	5.0SMDJ43CA									



5.0SMDJ5 1A	5.0SMDJ5 1CA	5PFZ	5BFZ	51.0	56.70	62.70	1	82.4	61.29	5
5.0SMDJ5 4A	5.0SMDJ5 4CA	5PGE	5BGE	54.0	60.00	66.30	1	87.1	57.98	5
5.0SMDJ5 8A	5.0SMDJ5 8CA	5PG G	5BG G	58.0	64.40	71.20	1	93.6	53.95	5
5.0SMDJ6 0A	5.0SMDJ6 0CA	5PGK	5BGK	60.0	66.70	73.70	1	96.8	52.17	5
5.0SMDJ6 4A	5.0SMDJ6 4CA	5PG M	5BG M	64.0	71.10	78.60	1	103.0	49.03	5
5.0SMDJ7 0A	5.0SMDJ7 0CA	5PGP	5BGP	70.0	77.80	86.00	1	113.0	44.69	5
5.0SMDJ7 5A	5.0SMDJ7 5CA	5PG R	5BG R	75.0	83.30	92.10	1	121.0	41.74	5
5.0SMDJ7 8A	5.0SMDJ7 8CA	5PGT	5BGT	78.0	86.70	95.80	1	126.0	40.08	5
5.0SMDJ8 0A	5.0SMDJ8 0CA	5PGB	5BGB	80.0	88.80	97.60	1	129.6	38.97	5
5.0SMDJ8 5A	5.0SMDJ8 5CA	5PGV	5BGV	85.0	94.40	104.0 0	1	137.0	36.86	5
5.0SMDJ9 0A	5.0SMDJ9 0CA	5PGX	5BGX	90.0	100.0 0	111.0 0	1	146.0	34.59	5
5.0SMDJ1 00A	5.0SMDJ1 00CA	5PGZ	5BGZ	100.0	111.0 0	123.0 0	1	162.0	31.17	5
5.0SMDJ1 10A	5.0SMDJ1 10CA	5PHE	5BHE	110.0	122.0 0	135.0 0	1	177.0	28.53	5
5.0SMDJ1 20A	5.0SMDJ1 20CA	5PH G	5BH G	120.0	133.0 0	147.0 0	1	193.0	26.17	5
5.0SMDJ1 30A	5.0SMDJ1 30CA	5PHK	5BHK	130.0	144.0 0	159.0 0	1	209.0	24.16	5
5.0SMDJ1 40A	5.0SMDJ1 40CA	5PHB	5BHB	140.0	155.0 0	171.0 0	1	226.8	22.27	5
5.0SMDJ1 50A	5.0SMDJ1 50CA	5PH M	5BH M	150.0	167.0 0	185.0 0	1	243.0	20.78	5
5.0SMDJ1 60A	5.0SMDJ1 60CA	5PHP	5BHP	160.0	178.0 0	197.0 0	1	259.0	19.50	5
5.0SMDJ1 70A	5.0SMDJ1 70CA	5PHR	5BHR	170.0	189.0 0	209.0 0	1	275.0	18.36	5
5.0SMDJ1 80A	5.0SMDJ1 80CA	5PHT	5BHT	180.0	201.0 0	220.0 0	1	291.6	17.32	5
5.0SMDJ1 90A	5.0SMDJ1 90CA	5PHV	5BHV	190.0	211.0 0	232.0 0	1	307.8	16.41	5
5.0SMDJ2 00A	5.0SMDJ2 00CA	5PH W	5BH W	200.0	224.0 0	247.0 0	1	324.0	9.26	5
5.0SMDJ2 20A	5.0SMDJ2 20CA	5PHX	5BHX	220.0	246.0 0	272.0 0	1	356.0	8.43	5
5.0SMDJ2 50A	5.0SMDJ2 50CA	5PHZ	5BHZ	250.0	279.0 0	309.0 0	1	405.0	7.41	5
5.0SMDJ3 00A	5.0SMDJ3 00CA	5PJE	5BJE	300.0	335.0 0	371.0 0	1	486.0	6.17	5
5.0SMDJ3 50A	5.0SMDJ3 50CA	5PJG	5BJG	350.0	391.0 0	432.0 0	1	567.0	5.29	5
5.0SMDJ4 00A	5.0SMDJ4 00CA	5PJK	5BJK	400.0	447					

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.
4. $V_F < 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} > 201\text{V}$.

Functional Diagram**Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)****Figure 1 - Peak Pulse Power Rating Curve****Figure 2 - Pulse Derating Curve****Figure 3 - Pulse Waveform****Figure 4 - Typical Junction Capacitance****Figure 5 - Steady State Power Derating Curve****Figure 6 - Maximum Non-Repetitive Surge Current**

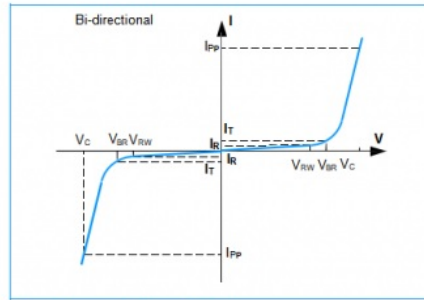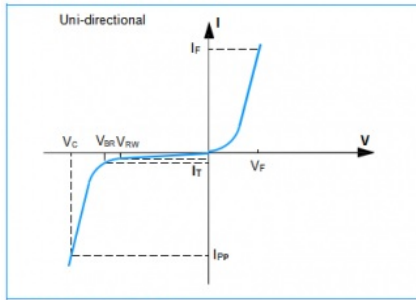I-V Curve Characteristics




Physical Specifications

Weight	0.007 ounce, 0.21 gram
Case	JEDEC DO-214AB Molded Plastic over glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications


Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

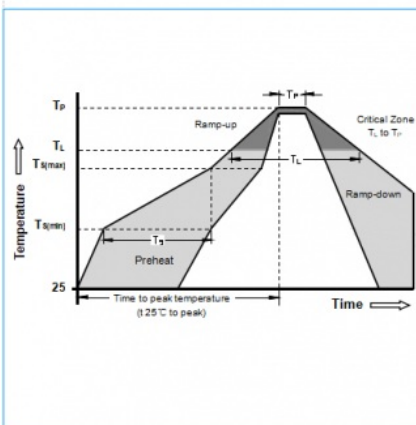Soldering Parameters



Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{s(min)}$)	150°C
	-Temperature Max ($T_{s(max)}$)	200°C
	-Time (min to max) (T_s)	60 - 180 Seconds
Average ramp up rate (Liquidus Temp T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Time (min to max) (T_L)	60 - 150 Seconds
Peak Temperature (T_P)		260 +0/-5°C
Time within 5 °C of actual peak Temperature (T_P)		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max
Do not exceed		280°C

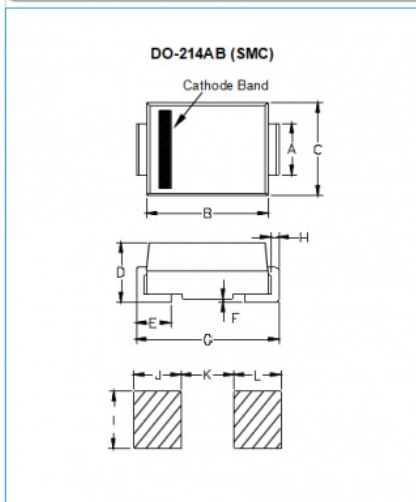Dimensions





Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.108	0.126	2.750	3.200
B	0.260	0.280	6.520	7.110
C	0.217	0.244	5.520	6.220
D	0.080	0.112	2.050	2.850
E	0.030	0.060	0.750	1.520
F	-	0.008	-	0.203
G	0.305	0.320	7.640	8.130
H	0.006	0.012	0.150	0.310
I	0.121	-	3.070	-
J	0.068	-	1.715	-
K	-	0.185	-	4.690
L	0.068	-	1.715	-

Part Numbering

5.0 SMDJ xxx CA	
5.0	5% V_{BR} VOLTAGE TOLERANCE
SMDJ	BI-DIRECTIONAL
xxx	V_R VOLTAGE
CA	SERIES

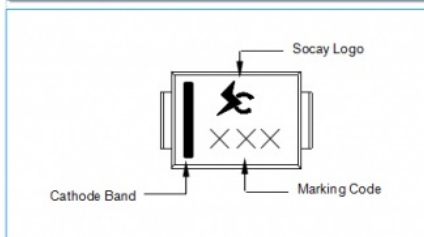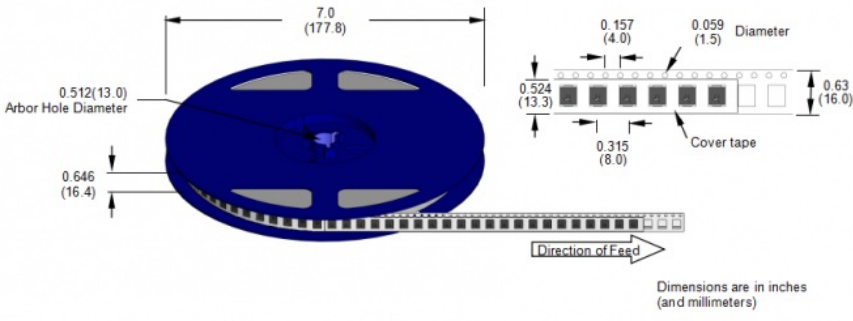Part Marking



Packaging					
Part Number	Component Package	Quantity	Packaging	Option	Packaging Specification
5.0SMDJXXXXX	DO-214AB	500	Tape & Reel -16mm/7"tape		EIA STD RS-481
Tape and Reel Specifications					
 Diagram illustrating the Tape and Reel Specifications for the component. The reel has an outer diameter of 7.0 (177.8) inches. The arbor hole diameter is 0.512 (13.0) inches. The tape width is 0.646 (16.4) inches. The tape pitch is 0.157 (4.0) inches. The component diameter is 0.059 (1.5) inches. The cover tape thickness is 0.0315 (8.0) inches. The dimensions are in inches and millimeters.					

 **Socay® Shenzhen Socay Electronics Co., Ltd.**

 +8618126201429
  sylvia@socay.com
  socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China