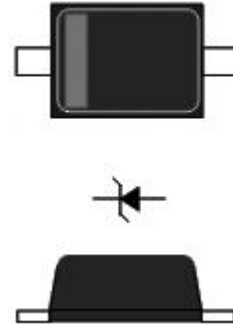


Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

Features

- ◆ Constant voltage control
- ◆ Wide voltage range selection 2.4V to 75V
- ◆ SOD-523 Thin SMD package
- ◆ RoHS compliant / Green EMC
- ◆ Matte Tin (Sn) Lead finish
- ◆ Cathode Band / Device marking
- ◆ Refer to table list

SOD-523


Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Units
Power Dissipation	P_D	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 to +150	°C
Maximum Regulator Current	I_{ZM}	P_D / V_Z	mA

Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

Electrical Characteristics

Part Number	V _Z ^{*1}			I _{ZT}	Z _{YT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R	V _R
	Nom.(V)	Min.(V)	Max.(V)	(mA)	Max.(Ω)		(mA)	Max.(μA)	(V)
BZX584C2V4	2.4	2.2	2.6	5	100	600	1.0	50	1.0
BZX584C2V7	2.7	2.5	2.9	5	100	600	1.0	20	1.0
BZX584C3V0	3.0	2.8	3.2	5	95	600	1.0	10	1.0
BZX584C3V3	3.3	3.1	3.5	5	95	600	1.0	5	1.0
BZX584C3V6	3.6	3.4	3.8	5	90	600	1.0	5	1.0
BZX584C3V9	3.9	3.7	4.1	5	90	600	1.0	3	1.0
BZX584C4V3	4.3	4.0	4.6	5	90	600	1.0	3	1.0
BZX584C4V7	4.7	4.4	5.0	5	80	500	1.0	3	2.0
BZX584C5V1	5.1	4.8	5.4	5	60	480	1.0	2	2.0
BZX584C5V6	5.6	5.2	6.0	5	40	400	1.0	1	2.0
BZX584C6V2	6.2	5.8	6.6	5	10	150	0.5	3	4.0
BZX584C6V8	6.8	6.4	7.2	5	15	80	0.5	2	4.0
BZX584C7V5	7.5	7.0	7.9	5	15	80	0.5	1	5.0
BZX584C8V2	8.2	7.7	8.7	5	15	80	0.5	0.7	5.0
BZX584C9V1	9.1	8.5	9.6	5	15	100	0.5	0.5	6.0
BZX584C10V	10	9.4	10.6	5	20	150	1.0	0.2	7.0
BZX584C11V	11	10.4	11.6	5	20	150	1.0	0.1	8.0
BZX584C12V	12	11.4	12.7	5	25	150	1.0	0.1	8.0
BZX584C13V	13	12.4	14.1	5	30	170	1.0	0.1	8.0
BZX584C15V	15	13.8	15.6	5	30	200	1.0	0.1	10.5
BZX584C16V	16	15.3	17.1	5	40	200	1.0	0.1	11.2
BZX584C18V	18	16.8	19.1	5	45	225	1.0	0.1	12.6
BZX584C20V	20	18.8	21.2	5	55	225	1.0	0.1	14.0

Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

Electrical Characteristics (Continue)

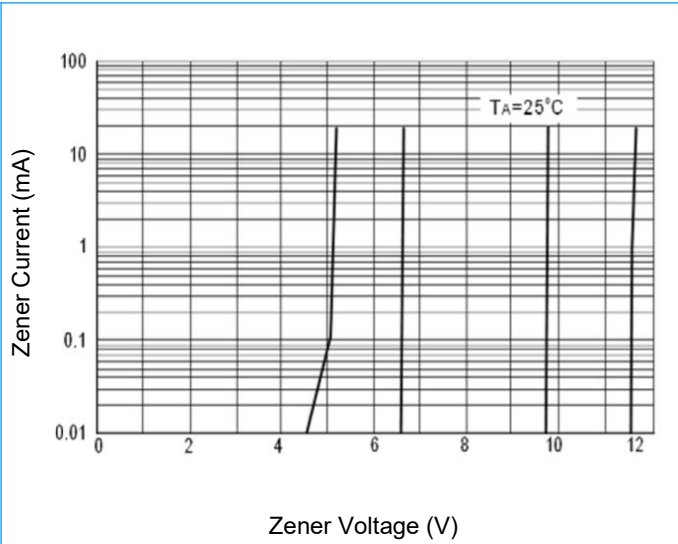
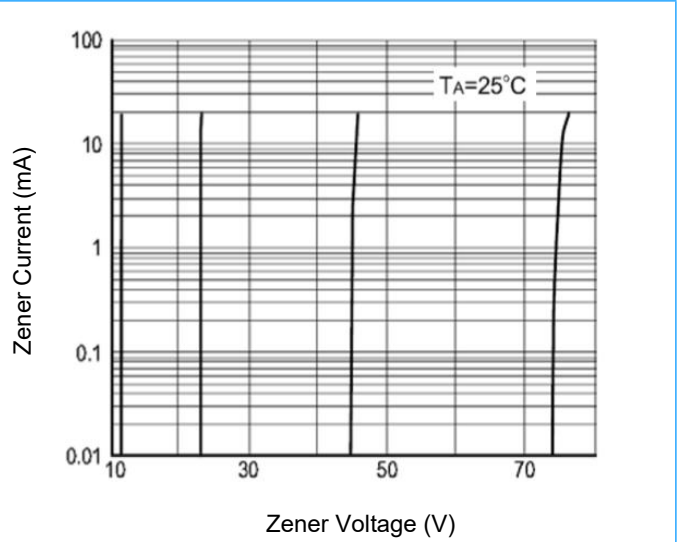
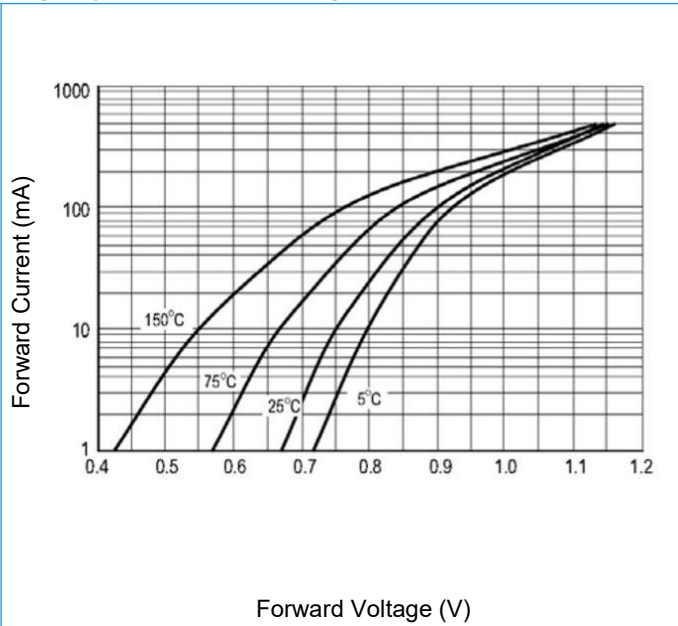
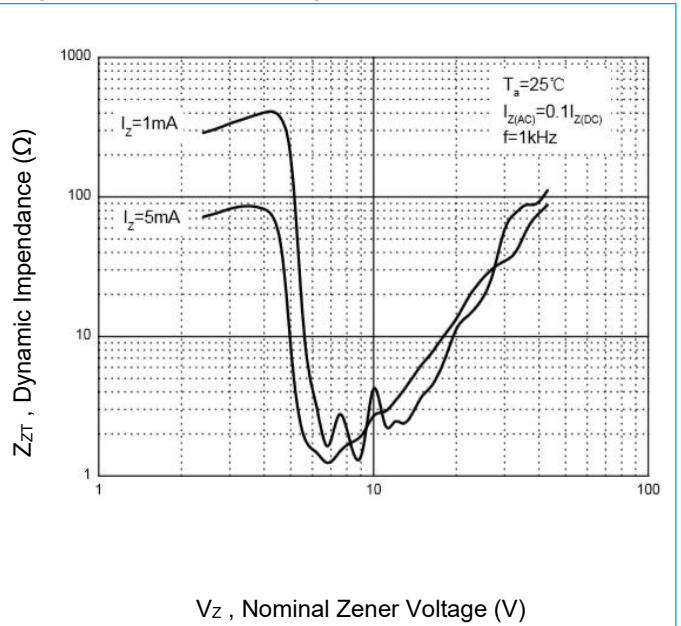
Part Number	V _Z *1			I _{ZT}	Z _{YT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R	V _R
	Nom.(V)	Min.(V)	Max.(V)	(mA)	Max.(Ω)		(mA)	Max.(μA)	(V)
BZX584C22V	22	20.8	23.3	5	55	250	1.0	0.1	15.4
BZX584C24V	24	22.8	25.6	5	70	250	1.0	0.1	16.8
BZX584C27V	27	25.1	28.9	2	80	300	0.5	0.1	18.9
BZX584C30V	30	28.0	32.0	2	80	300	0.5	0.1	21.0
BZX584C33V	33	31.0	35.0	2	80	325	0.5	0.1	23.1
BZX584C36V	36	34.0	38.0	2	90	350	0.5	0.1	25.2
BZX584C39V	39	37.0	41.0	2	130	350	0.5	0.1	27.3
BZX584C43V	43	40.0	46.0	2	100	700	1.0	0.1	32.0
BZX584C47V	47	44.65	49.35	2	170	1000	0.25	0.1	36.0
BZX584C51V	51	48.45	53.55	2	180	1300	0.25	0.1	39.0
BZX584C56V	56	53.2	58.8	2	200	1400	0.25	0.1	43.0
BZX584C62V	62	58.9	65.1	2	225	1400	0.25	0.1	47.0
BZX584C68V	68	64.6	71.4	2	240	1600	0.25	0.1	52.0
BZX584C75V	75	71.25	78.75	2	265	1700	0.25	0.1	56.0

*1 Pulse width = 10 ms.

Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

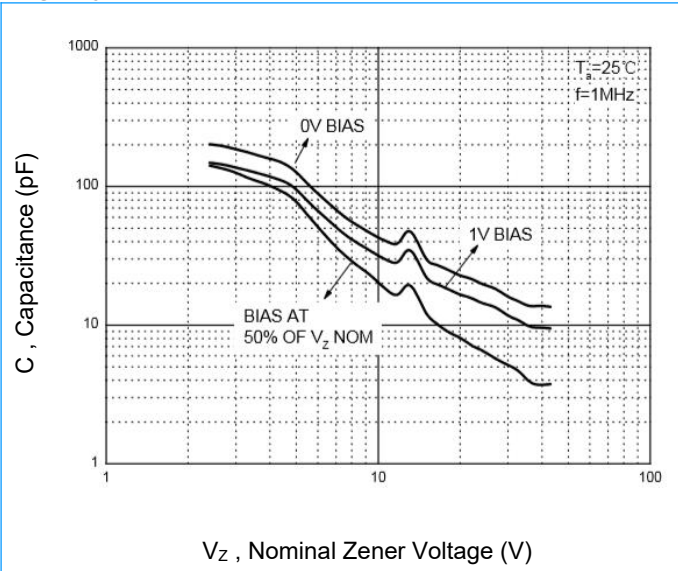
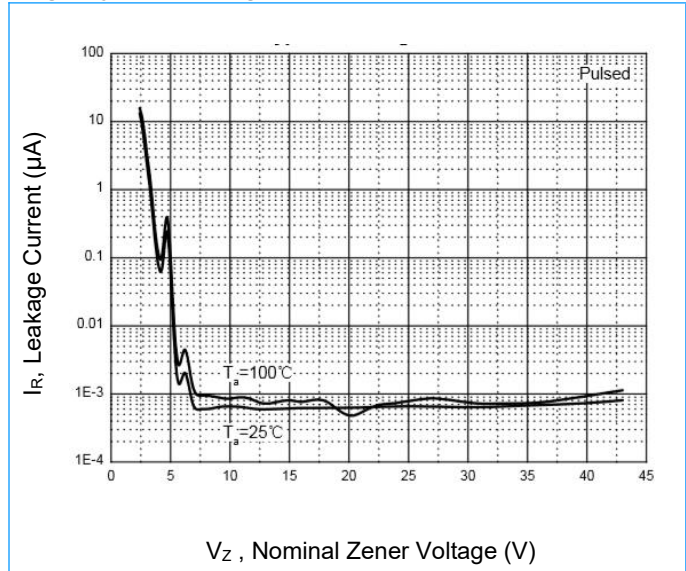
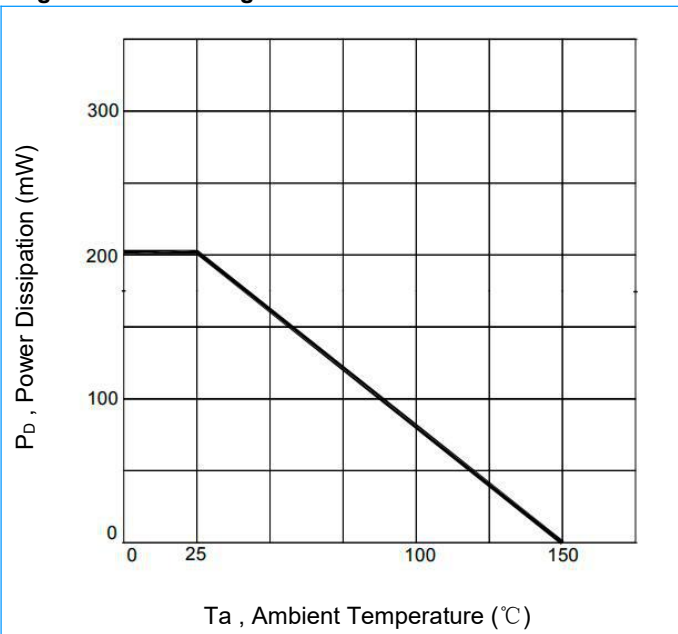
Typical Characteristics

Fig1. Zener Breakdown Characteristic

Fig2. Zener Breakdown Characteristics

Fig3. Typical Forward Voltage

Fig4. Effect of Zener Voltage on Zener Impedance


Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

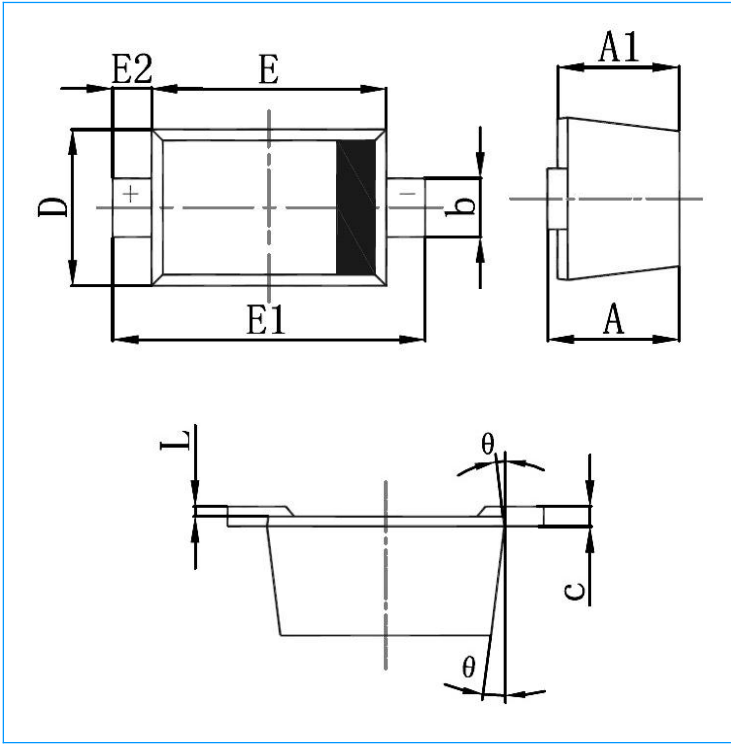
Rating and Characteristic Curves (Continue)

Fig5. Typical Capacitance

Fig6. Typical Leakage Current

Fig7. Power Derating Curve


Surface Mount Zener Diodes

BZX584C2V4~BZX584C75V
2.4 to 75 V
200mW
SOD-523

SOD-523 Package Outline (Dimensions in inches and (millimeters))



Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.400	0.010	0.016
c	0.080	0.150	0.003	0.006
D	0.750	0.900	0.030	0.035
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7°REF		7°REF	

Ordering Information

Part Number	Component Package	Shipping
BZX584C2V4~BZX584C75V	SOD-523	Tape & Reel 8000 PCS / 7" Reel

Warning



- ◆ SOCAY owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property.
- ◆ SOCAY reserves the right to make changes without further notice to any products herein.
- ◆ SOCAY makes no warranties, representations or warranties as to the fitness of its products for any particular purpose, and disclaims any liability.
- ◆ The parameters provided in the SOCAY datasheet specification may vary from application to application, and the actual performance may vary over time. All operating parameters must be verified by the customer's technical expert before application.
- ◆ Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.